




PR-300 Polarity Reversal Module



Description:

The PR-300 with the FX2000 Series Fire Alarm Panel provides outputs for city box and polarity reversal applications. The PR-300 provides off premises signal transmission for systems that must comply with NFPA requirements for Auxiliary Protective Systems.

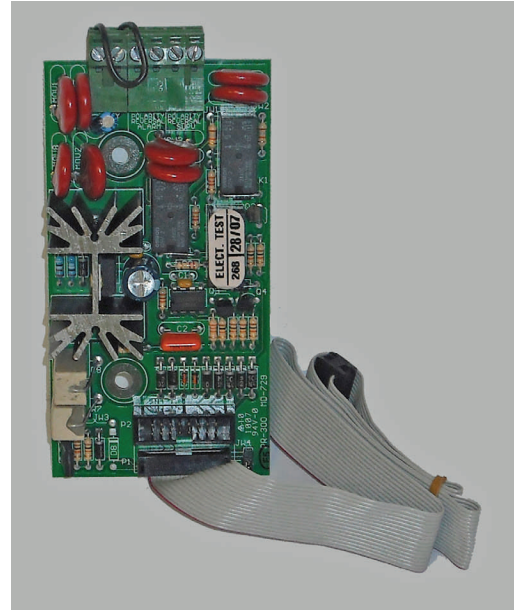

PR-300

Operation:

As a city tie module the PR-300 provides an Interface between the control panel and a local energy master box. As a polarity reversal module the PR-300 provides an interface between the control panel and a reverse polarity receiver.

Features:

- Provides outputs for city box and polarity reversal applications
- Conforms to NEMA Standard SB3-1969
- Easy to install
- Easy to configure

King-Fisher Company, inc.

2350 Foster Ave. Wheeling, Il. 60090— 6574

Phone (847)398-7100 Fax (847)255-1507

Phone (888)687-5324(US) Fax (877)687-5324(US)

E-MAIL: sales@kfco.com

WEBSITE: www.kfci.us

Operations:


City Tie: 24V DC unfiltered/ 250mA max/ 14 ohms trip coil
Polarity Reversal: 24V DC open/ 12V DC at 3.5mA /8.5mA max (shorted)
Polarity Reversal Supv Terminal: -24 DC (supervisory)/ 0V (trouble)
Polarity Reversal Alarm Terminal: -24 DC (alarm)/ 0V (trouble)

Current Consumption:
Standby: .05A
Alarm: .07A
Weight: .55 ounces
.25 kg

Ordering Information:

Model No.	Description
PR-300	Polarity Reversal Module
SPR300	Data Specification Sheet

PR-300 Mounting/Configuration

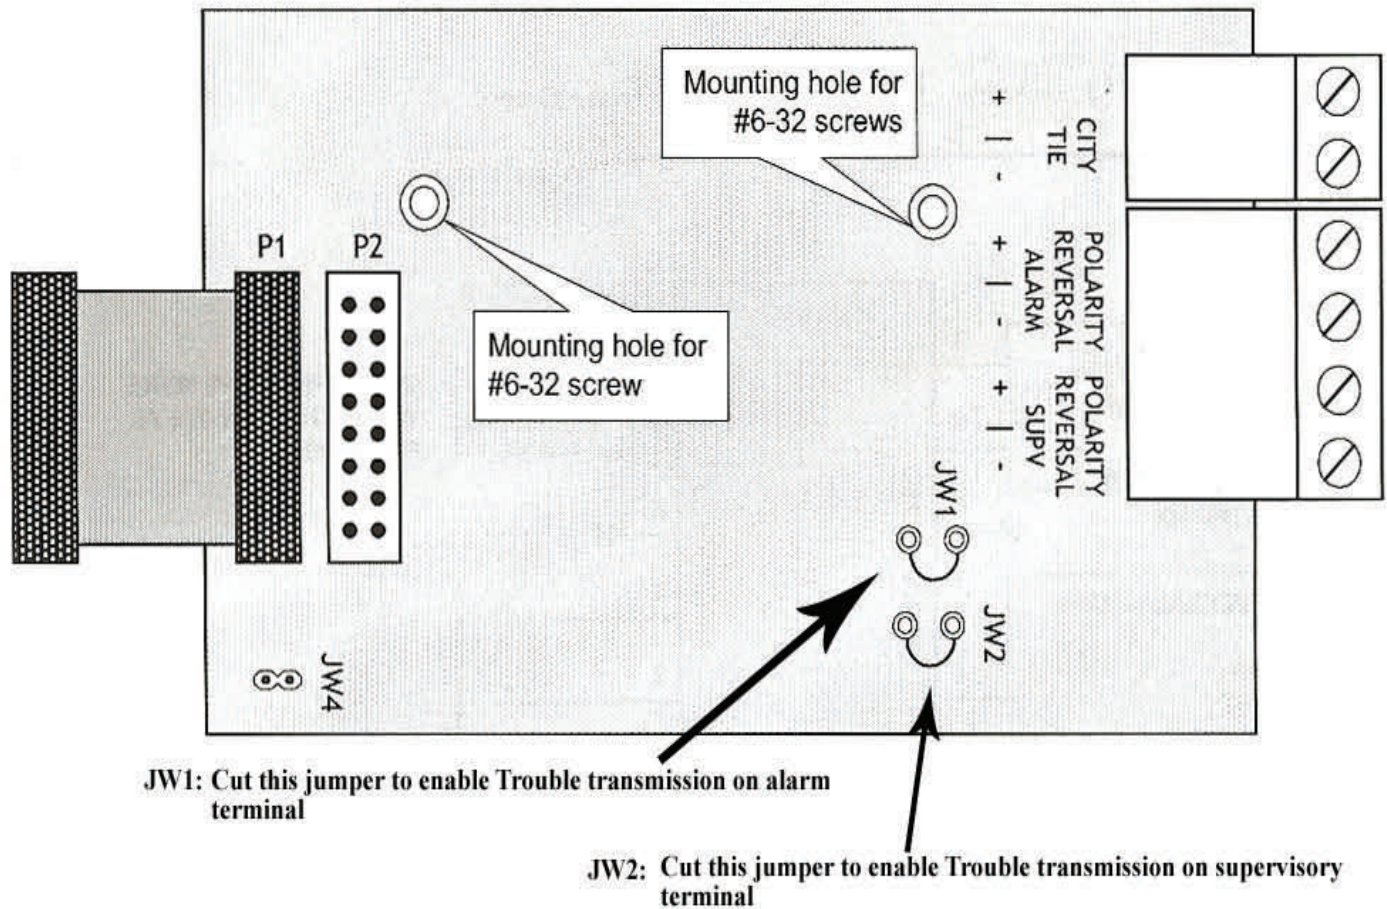

Specifications are provided for information only and are believed to be accurate. However, no responsibility is assumed by King-Fisher Company inc., for their use. Specifications subject to change without notice.