




Kingfisher Company, inc.

RAX-048 Programmable Zone LED Annunciator Module

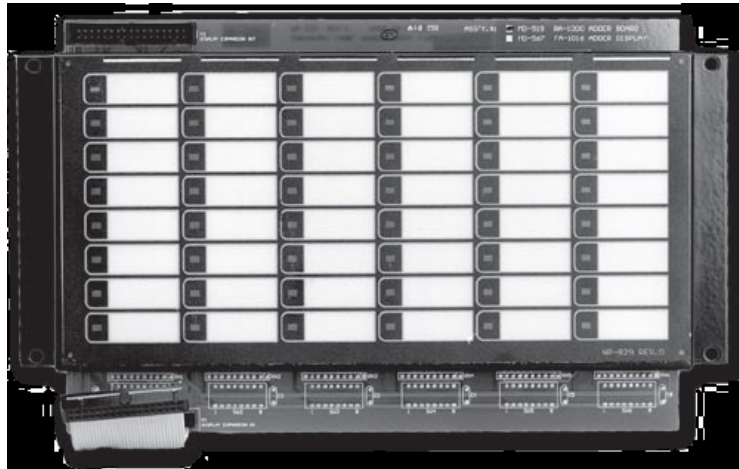

Description:

The RAX-048 Programmable Zone LED Annunciator Module, for use with the FX2003 Addressable Transmitter, provides 48 programmable bi-colored LEDs. The RAX-048 is used if additional LED zone annunciation is required. The addressable points can be grouped together to light one LED, or they can be part of many groups and therefore may turn on many LEDs. The circuits can be selected as either Alarm to illuminate the red LED or for Supervisory to illuminate the amber LED. Any zone trouble condition will be displayed on the Shared Display. The RAX-048 can be connected to the main panel or it can be connected to the RAX-LCD Remote Shared Display if a programmable remote LED annunciator is required. When configured in this manner, it requires two frames when connected to either the main or remote shared display.

The RAX-048 is used in conjunction with the RAX-LCD when a different type of annunciation configuration or a different location is required. The RAX-048 occupies one display position in the BB-1000 or BB-5000 enclosures.

Features:

- Provides 48 Programmable Bi-Colored LEDs
- Addressable points can be grouped together to light one LED
- Zone Trouble Condition will displayed on the Shared Display
- RAX-048 occupies one display position in the BB-1000 or BB-5000 enclosures
- Slide-In Paper Labels included for zone labeling purposes

Specifications:

- Standby:** 15mA
Alarm: 100mA
P1: Cable connects to P2 of previous Display Module
P2: Cable connects to P1 of next Display Module
Note: The Display Module comes with Laser Printer compatible Slide-In Paper Labels for Zone labeling purposes.

ORDERING INFORMATION

KCi #	Model #	Description
52154	KFRAX-048	Annunciator- LED Common Control Switches
52154-DTS		Specification Data Sheet

Kingfisher Company, inc., products must be used within their published specifications and must be PROPERLY specified, applied, installed, operated, maintained and operationally tested in accordance with their installation instructions at the time of installation and at least twice a year or more often and in accordance with local, state and federal codes, regulations and laws. Specification, application, installation, operation, maintenance and testing must be performed by qualified personnel for proper operation in accordance with all of the latest National Fire Protection Association (NFPA), Underwriters' Laboratories (UL), National Electrical Code (NEC), Occupational Safety and Health Administration (OSHA), local, state, county, province, district, federal and other applicable building and fire standards, guidelines, regulations, laws and codes including, but not limited to, all appendices and amendments and the requirements of the local authority having jurisdiction (AHJ).

NOTE: Due to continuous development of our products, specifications and offerings are subject to change without notice in accordance with Kingfisher Company, inc., standard terms and conditions

Kingfisher Company, inc. 81 Old Ferry Road - Lowell, MA 01854
Phone: 978-596-0214 Fax: 978-596-0217 www.kfci.com