



**KF700ADU Series
Manual Stations**



Description:

The KF700ADU Series Manual Station provides manual fire reporting. This high quality, die-cast metal Intelligent Fire Alarm Manual Station is available as either single or dual action devices with key reset and a permanently attached addressable module. The addressable manual station has a pair of rotary decimal switches which allows for two digit address setting.



KF710ADU

Operation:

The normally open contact, closes when the manual station is activated. The contacts are gold plated to avoid the risk of Corrosion. Pulling the handle initiates the operation of the addressable module. The Pull Station is reset by opening the station with the key (CAT-211), placing the handle in the normal upright position and re-locking the station.

Features:

- **Single or Dual Action Pull Station**
- **Permanently Attached Intelligent Addressable Module**
- **Key Resettable (CAT-211)**
- **Gold plated to avoid the risk of corrosion**
- **High-gloss Red Enamel Finish**
- **Mounts on Standard Single Gang Box or KFBB-700 Surface Metal Back Box**
- **UL Listed**
- **ADA compliant**

King-Fisher Company, inc.

2350 Foster Ave. Wheeling, Il. 60090— 6574

Phone (847)398-7100 Fax (847)255-1507

Phone (888)687-5324(US) Fax (877)687-5324(US)

E-MAIL: sales@kfco.com

WEBSITE: www.kfci.us

Specifications

Pull Station Dimensions: 4.9" H x 3.5" W x 2.0" D

Surface-mount Backbox Dimensions: 5.0" H x 3.6" W x 2.0" D

Color: Red with raised white letters, white Pull bar with raised red letters.

Current Consumption: Standby: .0004A
Alarm: .0055A


Maximum Wire Size: 12 Awg.

Note: All manual fire alarm stations shall be installed as per the specific requirements outlined in the current NFPA codes, as well as all other applicable national or local codes. Final acceptance is subject to the local authority having jurisdiction.

Ordering Information:

Model No.	Description
KF701ADU	Addressable Single Action Manual Station
KF710ADU	Addressable Dual Action Manual Station
KFBB-700	Backbox for KF700U Series
SKF700ADU	Data Specification Sheet

Typical Wiring Diagram

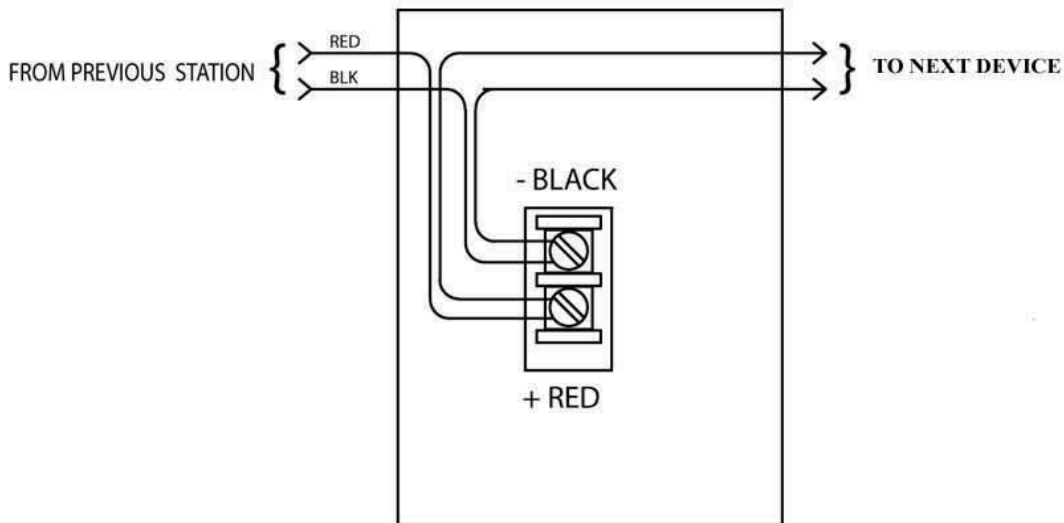

1. WIRE AS SHOWN SO THAT SUPERVISION OF CONNECTION ARE MAINTAINED
2. MOUNT STATION TO 4" SQUARE X 1 1/2" DEEP OUTLET BOX WITH PLASTER RING RAISED 1/2" OR SINGLE GANG 3 1/2" OR KFBB-700 BACK BOX.

Specifications are provided for information only and are believed to be accurate. However, no responsibility is assumed by King-Fisher Company inc., for their use. Specifications subject to change without notice.